


軸端部詳細

付属キー: 10×8×40(片丸)(JIS B 1301)
(軸端取付け納入)

[ケースにアイボルト取付穴があるモータ型式]

保持ブレーキ無し	NA820-752N(7.5KW)
保持ブレーキ付き	NA820-402B(4.0KW) NA820-602B(6.0KW) NA820-752B(7.5KW)

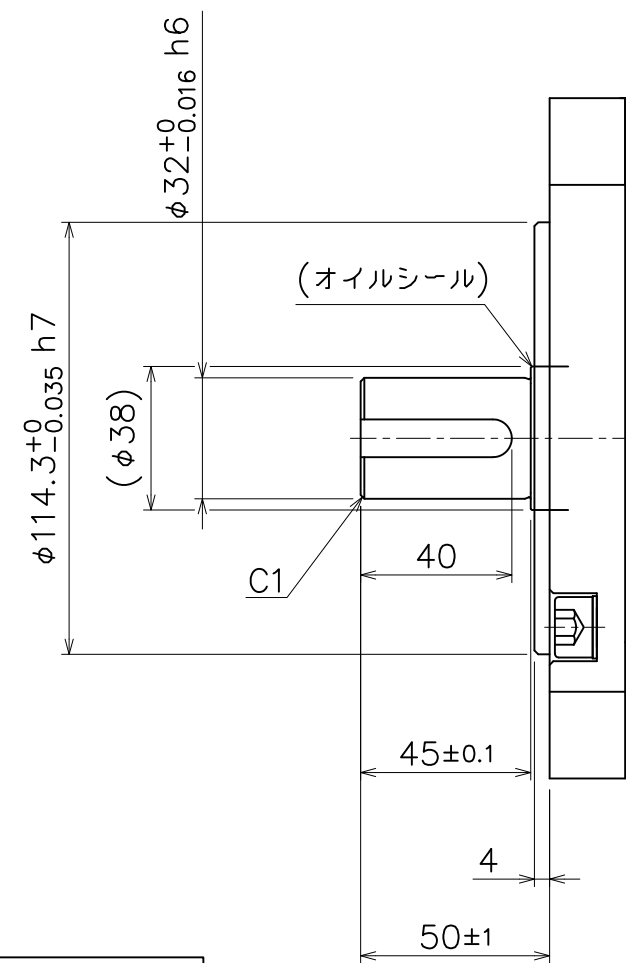

コネクタ向き詳細

[保持ブレーキ無し]

型式	NA820-402N(4.0KW)	NA820-602N(6.0KW)	NA820-752N(7.5KW)
L1 (mm)	188	212	236
L2 (mm)	87	106	130
L3 (mm)	168.5	192.5	216.5

[保持ブレーキ付き]

型式	NA820-402B(4.0KW)	NA820-602B(6.0KW)	NA820-752B(7.5KW)
L1 (mm)	237	258	282
L2 (mm)	104	128	152
L3 (mm)	217.5	238.5	262.5