


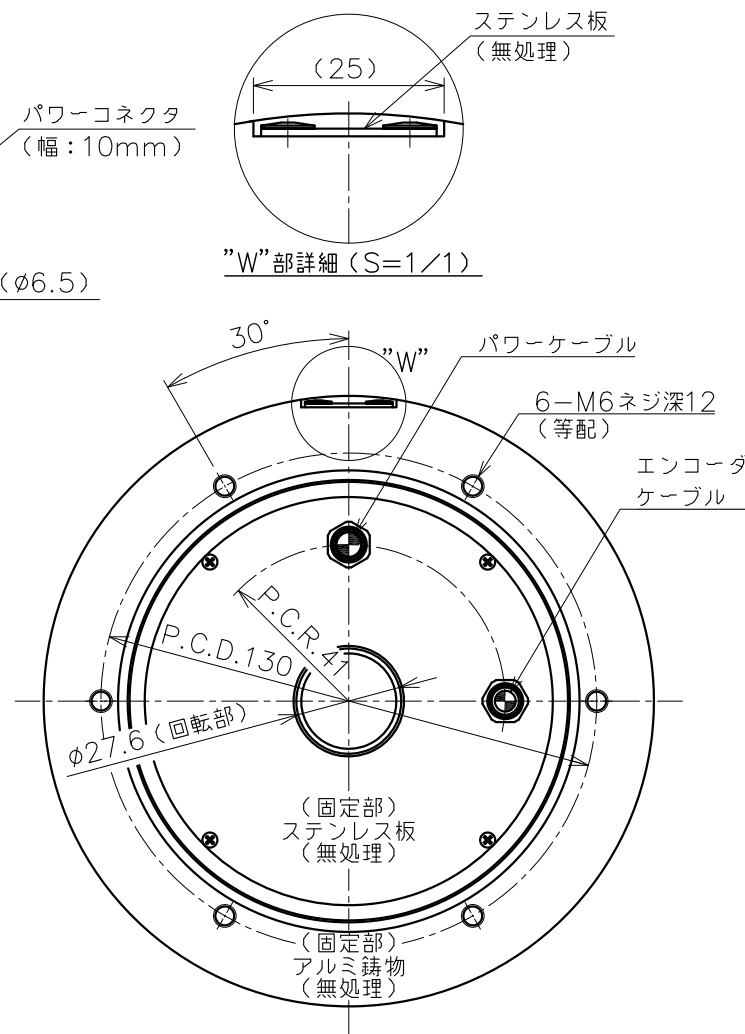

The image contains two technical drawings of a bolted joint, labeled 'Y' and 'Z' details.

Y部詳細 (S=1/1): This drawing shows a side view of the joint. It includes a bolt with a head diameter of $\phi 115$ and a head height of $\phi 116h7$. The bolt is secured with a lock nut (小ネジ頭). The distance from the bolt head to the center of the lock nut is 0.5 (ニゲ). The distance from the bolt head to the center of the main bolt is 0.3. The distance from the bolt head to the center of the main bolt is 0.7 (インロー). The distance from the bolt head to the center of the main bolt is 0.3 (隙間).

Z部詳細 (S=1/1): This drawing shows a side view of the joint. It includes a bolt with a head diameter of $\phi 115$ and a head height of $\phi 116h7$. The bolt is secured with a lock nut (小ネジ頭). The distance from the bolt head to the center of the lock nut is 0.5 (ニゲ). The distance from the bolt head to the center of the main bolt is 0.3. The distance from the bolt head to the center of the main bolt is 0.7 (インロー). The distance from the bolt head to the center of the main bolt is 0.3 (隙間).

銘板詳細	
図中表記	銘板名
銘板1	モータ銘板
銘板2	エンコーダ銘板

	パワーコネクタPIN配列		
	P I N	信 号	線 色
	1	U相	赤
	2	V相	白
	3	W相	黒
	4	アース	緑
	ハウジング：172167-1（TE製） コンタクト：170364-1（TE製）		

PIN	信号	PIN	信号
1	A	11	+5V
2	A*	12	GND
3	B	13	+5V
4	B*	14	GND
5	Z	15	FG
6	Z*		
7	PS		
8	PS*		
9	PC		
10	PC*		

ハウジング：172171-1（TE製）
コンタクト：170363-1（TE製）

◆ 荷重によりベアリング寿命、
振れ精度は異なります。
☆ 水平方向以外につきましては、
ご相談ください。

			備考 NOTE File name/SE-72432.dwg			出図番号 DRAWING No. R1-72432.1			製品番号 PRODUCT No. 248-0142		
			承認 APPROVED			照査 CHECKED			設計 DESIGNER		
									機種名称 MODEL rDISCモータ DD160-146-LS(INC) DD16-681L04ANN		
									図面名称 TITLE 外形図 (INC)		
									材質 MATERIAL 		
									尺度 SCALE 1/2		
変更 REV. MARK 出図 ENTRY No.			記事 REV. NOTE			承認 APPROVED DATE DATE DATE			製品番号 PRODUCT No. 248-0142		
						 NIKKI DENSO CKD日機電装株式会社			第三角法 third angle projection		
									図面番号 DRAWING No. S.E-72432		
									REV.		